



**BUILT
DIFFERENT**

 **Cub Cadet**
PRO SERIES



It's easy to stick with what you know.
But real progress starts with doing something different.

Different isn't afraid to stand out.

Different doesn't back down from an uphill battle.

Different pushes the limits of what's possible.

Different is the beating heart of innovation.

The Pro Series™ by Cub Cadet®

BUILT DIFFERENT

cubcadet.ca/pro





CONTENTS

PRO Z™ SERIES	6-17
PRO X™ SERIES	18-21
ACCESSORIES	22-23
SPECIFICATIONS	24-27



PRO Z™ SERIES

Your difference maker.

It takes a different kind of person to do what you do. And a different kind of machine. The PRO Z™ Series was built for exactly that. Maintenance-free spindles and EFI engine options amp up your productivity, while a fully welded frame and commercial-grade deck were engineered to stand up to tough demands for years to come.

The PRO Z™ Series offers category-exclusive steering systems engineered to tackle challenging terrain with up to a 20-degree incline. Add it to your crew and see the PRO Z™ difference for yourself.



What makes the Pro Z™ Series?

CATEGORY-EXCLUSIVE STEERING SYSTEMS

EPS STEERING WHEEL & LAP BAR

COMMERCIAL-GRADE STRENGTH

7-GAUGE STEEL DECK

EASY AND QUICK DECK ADJUSTMENTS

ELECTRO-HYDRAULIC LIFT SYSTEM[†]

HILLSIDE STABILITY

REAR DUAL-WHEEL TRACTION*

PRISTINE PASSES

MARBAIN® BLADES

*Standard on the PRO Z™ 972 SD and PRO Z™ 972 SDL. Available as an attachment, sold separately. *Only available on the PRO Z™ 900 Series



PRO Z 972 SD



PRO Z™ 700

HORSEPOWER:

Up to 31 hp**

ENGINE DISPLACEMENT:

Up to 999cc

DECK SIZES:

54", 60" and 72"

REAR TIRES:

24" x 12" - 12"

WARRANTY:

3-year, no-hour-limit limited warranty /

5-year, 1200-hour-limit limited warranty



PRO Z™ 900

HORSEPOWER:

Up to 38.5 hp**

ENGINE DISPLACEMENT:

999cc

DECK SIZES:

60" and 72"

REAR TIRES:

Up to 26" x 12" - 12"

WARRANTY:

3-year, no-hour-limit limited warranty /

5-year, 1200-hour-limit limited warranty

PRO Z™ ATTACHMENTS

Attachments Sold Separately



PCS 1900 power collection system

19-inch diameter impeller housing and a 12-bushel, three-bag collection system.



Mulch kit

Mulching your lawn clippings allows for quick decomposition and returns essential nutrients back to the yard.

PRO Z™ DUAL-WHEEL SERIES

Hillside stability solved.

You never back down from a challenge. That's why the PRO Z™ SD and SDL are dual-wheel commercial zero-turns specifically engineered to tackle challenging terrain with up to a 25-degree slope. And with up to 30 degrees of self-leveling air-ride seat comfort (exclusive to the SDL) these mowers are built to tackle properties with hilly and varying terrain.



DUAL REAR WHEELS

Oversized dual real wheels help provide stability, traction and precision on the PRO Z™ 972 SD and SDL.



PRO Z™ 972 SD EFI

HORSEPOWER:
38.5 hp**

SEAT SWIVEL:
-

WARRANTY:
3-year, no-hour-limit
limited warranty /
5-year, 1200-hour-limit limited warranty




PRO Z™ 972 SDL EFI

HORSEPOWER:
38.5 hp**

SEAT SWIVEL:
Self-leveling air-ride seat


WARRANTY:
3-year, no-hour-limit
limited warranty /
5-year, 1200-hour-limit limited warranty

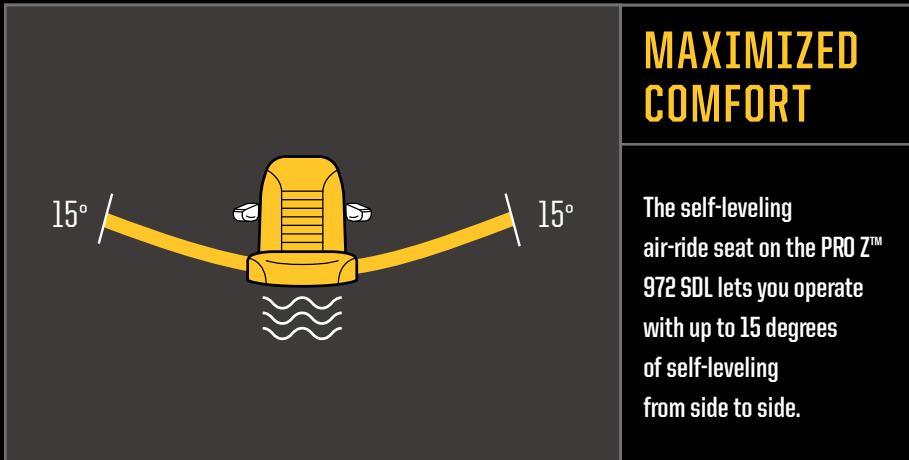

HILLSIDE CONFIDENCE

Four-wheel steering control with power steering for hillside stability.

- A** Up to a 25-degree slope
- B** Category exclusive steering wheel control with power steering
- C** Dual wheel traction control

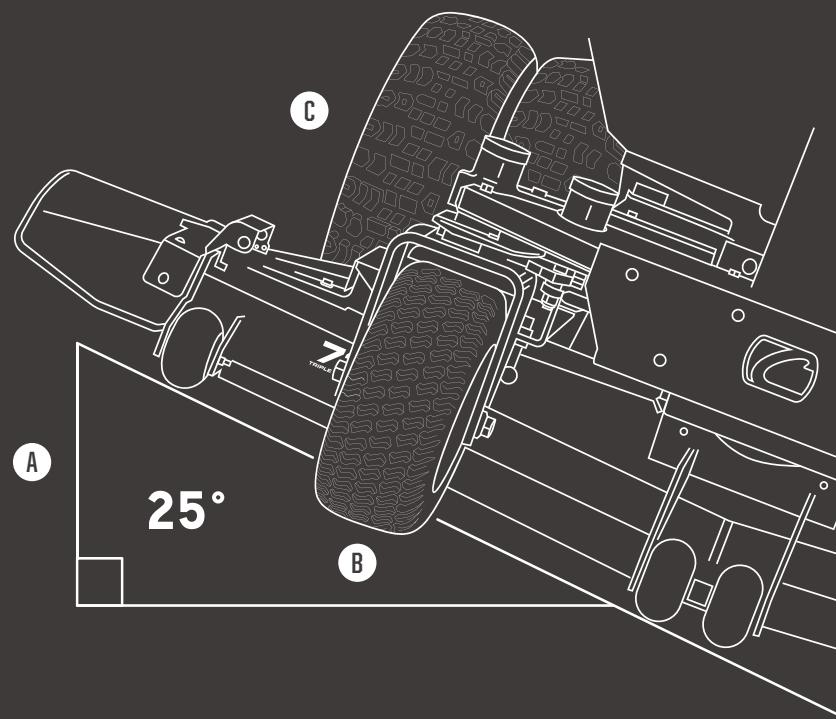

PRO Z™ COMFORT

A different level of comfort.

When days are as long as yours, comfort isn't just nice to have—it's necessary.


That's why we designed the PRO Z™ series to be a smooth ride. Innovative features like the isolation dampening system and air-ride suspension help absorb impacts of the job, while adjustable seat firmness, lumbar support and padded armrests provide additional comfort so you'll be able to go the distance.



PRO Z™ AIR-RIDE SEAT

Our air-ride seat allows riders to adjust seat firmness to their personal preference. Standard on the PRO Z™ 900.

- A** Air-ride control
- B** EVC cushion (elastic vibration control)
- C** Isolation-dampening system
- D** Angle-back adjustment
- E** Adjustable padded armrests
- F** Adjustable lumbar support

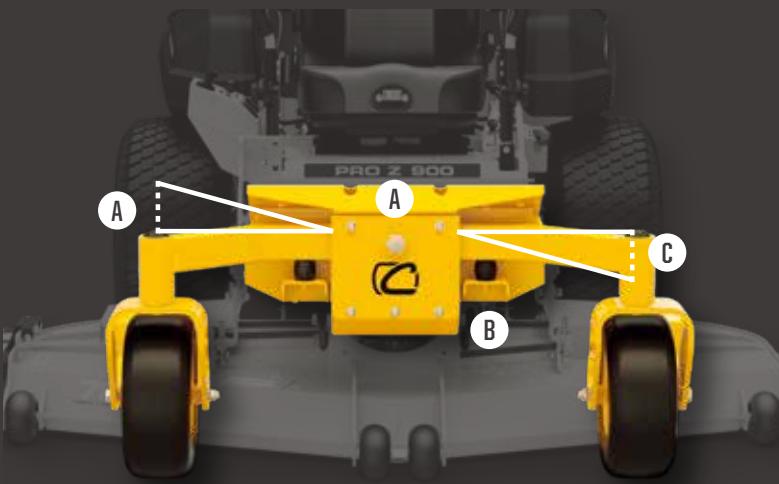

PIVOTING FRONT AXLE WITH ISOLATION-DAMPENING SYSTEM MOUNTS

A pivoting front axle allows the front end of the PRO Z™ to ride across uneven terrain while helping protect the quality of the cut.

The frame and axle float as the PRO Z™ moves, allowing the deck to follow the shape of the terrain and help avoid scalping.

- A** 2 1/4" of travel (4 1/2" of total travel)
- B** Isolation-dampening system (standard on the PRO Z™ 900 Series)
- C** Maximum angle of travel up to 6 degrees


PRO Z™ STRENGTH

Strength without compromise.

You expect the best and the PRO Z™ Series deck delivers. Fully fabricated and triple plated steel thickness with top and bottom reinforcements—so you can power through the rigors of your job, day in and day out.



3" total blade overlap

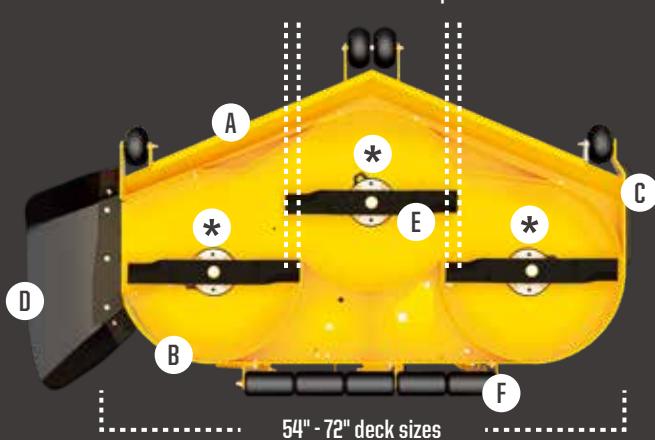

DECKS BUILT TO LAST

Tackle tough conditions with a triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements.

Durability

- Ⓐ 1/4" leading rolled edge
- Ⓑ 5/16" steel side reinforcements
- Ⓒ 3/4" wear guard
- ✳ Maintenance-free spindle assembly

Quality Cut

- Ⓓ Flexible rubber discharge chute
- Ⓔ High-lift Marbain blades (with blade tip speed up to 18,500 fpm)
- Ⓕ Adjustable rear striping roller (standard on the PRO Z 900 Series)

HARD-WORKING FRONT END

Help absorb the impact of rough terrain with front-end construction featuring a combination of axle, hub and yoke size.


- Ⓐ 2" x 3" pivoting front axle
- Ⓑ Isolation-dampening system (standard on the PRO Z 900 Series)
- Ⓒ 5" steel hubs
- Ⓓ 1/2" thick steel front yokes
- ✳ Sealed maintenance-free ball bearings



PRO Z™ PERFORMANCE

Built to meet high standards.

High standards like yours need high performance. That's why the PRO Z™ Series was engineered for consistent cut quality, in varying conditions. Featuring high-torque, commercial transmissions and high-horsepower, commercial-grade engines for optimal blade tip speed—and precise, single passes through thick grass.

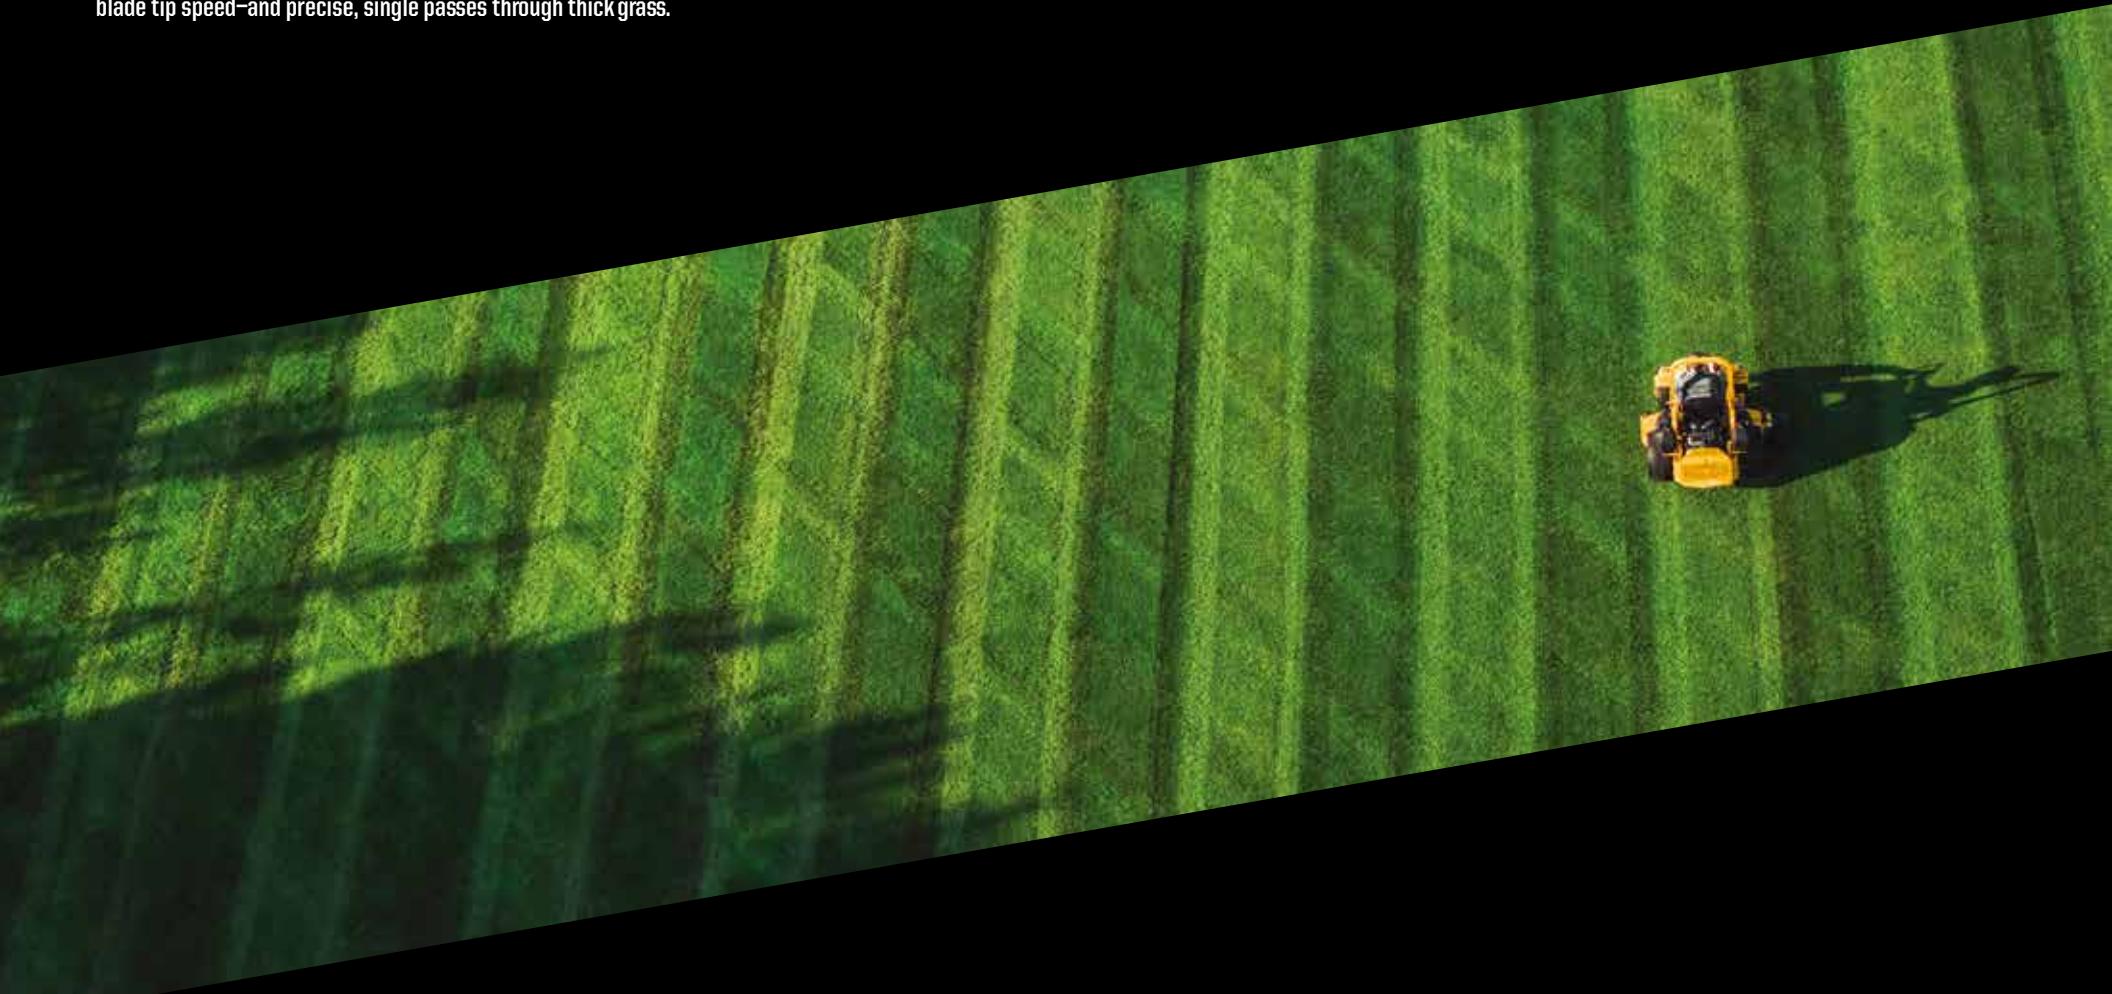

POWERFUL KAWASAKI® ENGINES



EFI engine technology available on select models

- Designed to deliver excellent horsepower
- Optimal balance of torque and power
- Maximum blade tip speed up to 18,500 fpm

Shown above:
Kawasaki FX Series 38.5 hp** (999cc)

MAX SPEED

PRO Z™ 700



16 kmh


PRO Z™ 900



22.5 kmh

COMMERCIAL-QUALITY CUT AT HIGH SPEEDS

High-lift Marbain® blades with
blade tip speed up to 18,500 fpm

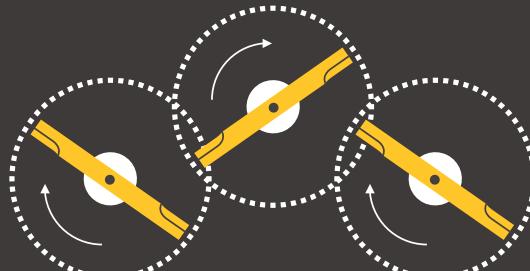

3" total blade overlap

(help save time by cutting more grass in one pass)

ENGINE HORSEPOWER AND TORQUE


◆ Horsepower [hp]

● Torque [ft-lb]

54.3 ft-lb

38.5 hp**

31 hp**

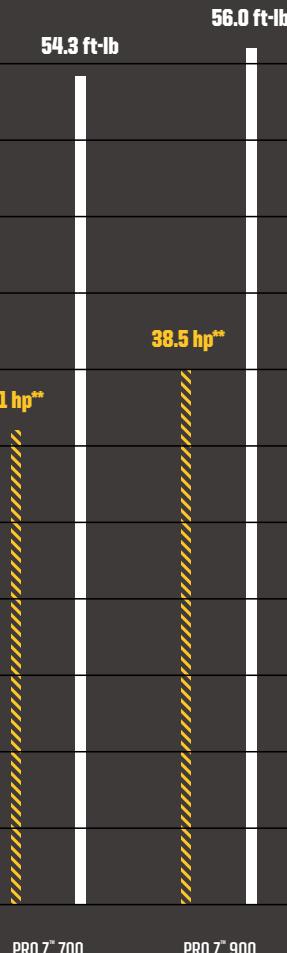

PRO Z™ 700

PRO Z™ 900



PRO X™ SERIES

Different done better.

Your business stands apart. Your machines should too. The PRO X™ Series takes stand-on productivity to the next level with zero-turn maneuverability, easy-to-adjust suspension and a fully fabricated deck—helping your operation go further.



What makes the Pro X™ Series?

COMPACT FOOTPRINT

OCCUPIES LITTLE TRAILER SPACE

EXCELLENT GROUND CLEARANCE

24-INCH TIRES

OPTIMAL PERFORMANCE

INTUITIVE MANEUVERABILITY

IMPACT ABSORPTION

ADJUSTABLE SUSPENSION

STRENGTH WITHOUT COMPROMISE

ULTRA-COMFORTABLE RIDE





PRO X 434

HORSEPOWER:
24 hp**

ENGINE DISPLACEMENT:
747cc

CUTTING WIDTH:
34"

REAR TIRES:
20" x 6.5" - 10"

WARRANTY:
See cubcadet.ca or your local dealer for warranty information

PRO X 448

HORSEPOWER:
24 hp**

ENGINE DISPLACEMENT:
747cc

CUTTING WIDTH:
48"

REAR TIRES:
20" x 8" - 10"

WARRANTY:
See cubcadet.ca or your local dealer for warranty information

PRO X 636

HORSEPOWER:
18.5 hp**

ENGINE DISPLACEMENT:
603cc

CUTTING WIDTH:
36"

REAR TIRES:
21" x 8.5" - 10"

WARRANTY:
2-year, no-hour-limit limited warranty

PRO X 648

HORSEPOWER:
22 hp**

ENGINE DISPLACEMENT:
726cc

CUTTING WIDTH:
48"

REAR TIRES:
24" x 9.5" - 12"

WARRANTY:
3-year, no-hour-limit limited warranty /
5-year, 1200-hour-limit limited warranty

PRO X 654

HORSEPOWER:
Up to 34.5 hp**

ENGINE DISPLACEMENT:
Up to 852cc

CUTTING WIDTH:
54"

REAR TIRES:
24" x 12" - 12"

WARRANTY:
3-year, no-hour-limit limited warranty /
5-year, 1200-hour-limit limited warranty

PRO X 660

HORSEPOWER:
Up to 29.5 hp**

ENGINE DISPLACEMENT:
Up to 852cc

CUTTING WIDTH:
60"

REAR TIRES:
24" x 12" - 12"

WARRANTY:
3-year, no-hour-limit limited warranty /
5-year, 1200-hour-limit limited warranty

PRO X™ ATTACHMENTS

Attachments Sold Separately



Side bagger

Side-mounted steel bagger with 4.3 cu·ft of capacity for grass, leaves and debris.



Light kit

Help illuminate your mowing path with the easy-to-install pre-wired LED light kit that has pre-drilled mounting points.

ACCESSORIES

(sold separately)

PRO Z™ 700

PRO Z™ 900

Z 972 SD EFI	Z 972 SDL EFI	X 434	X 448	X 636	X 648	X 654	X 654 EFI	X 660	X 660 EFI
•	•	•	•	•	•	•	•	•	•
				•	•	•	•	•	•
•		•							
		•	•		•	•	•	•	•
		•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•								
					•	•	•	•	•

PRO Z™ SERIES

PRO Z™ 700

	Z 754 L	Z 754 S	Z 760 L	Z 760 S	Z 772 L
ENGINE AND DRIVE SYSTEM					
Engine / Manufacturer	Kawasaki® FX 850		Kawasaki® FX 921V		
Horsepower	27 hp**		31 hp**		
Displacement	852cc		999cc		
Fuel Capacity		15 gal (twin 7.5 gal tanks)			
Transmission		Hydro-Gear® 4400 with dual release levers			
Ground Speed (Forward/ reverse)		Up to 19.3 kmh / 9.6 kmh			
MOWER DECK					
Cutting Width	54"		60"		72"
Deck Shell Construction		Floating, fabricated 7 ga (0.187") steel			
Reinforcements (Top/bottom - leading edge)		7 ga/7 ga-1/4"			
Side Reinforcement		5/16" steel			
Wear Guard		3/4" trim-side (polymer)			
Blades / Blade Tip Speed		3 high-lift Marbain blades / 18,500 fpm (approx.)			
Spindle Construction		8" sealed cast-aluminum housing (maintenance-free)			
Discharge Chute		High-density rubber			
Deck Lift System		Foot pedal with spring assist			
Height Positions / Height Range		16 1"-5"			
CHASSIS					
ROPS		2" x 2" quick-latch toolless foldable 3-position			
Rear Bumper		5/16"-thick steel, standard rear hitch (e-coated)			
Additional Bumper Features		Pre-drilled mounts for attachments			
Frame		Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)			
Additional Frame Features		Integrated tie-down slots			
Safety Lighting		-			
Front Axle		2" x 3" solid steel with sealed ball bearings			
Front Yoke		1/2"-thick steel with sealed ball bearings			
OPERATION					
PTO (L/S models)		Warner PTO clutch (200 ft-lb / 225 ft-lb)			
Steering Control (L/S models)		Lap bar / adjustable tilting steering wheel with EPS			
Operator Controls		Low-profile throttle lever with dash guard			
Additional Controls		Sealed key switch / fingertip engagement PTO / resettable maintenance meter			
Parking Brake (L/S models)		Hand operated			
Front Tires (L/S models)	13" x 6.5"-6" Reliance Carlisle run-flat	15" x 6"-6" Kenda Turf Tires K505	13" x 6.5"-6" Reliance Carlisle run-flat	15" x 6"-6" Kenda K505	13" x 6.5"-6" Reliance Carlisle run-flat
Rear Tires (L/S models)			Turf 24" x 12"-12"		
Seat Type		High-back dial suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, isolation-dampening system mounted base (lateral suspension)			
Seat Control Swivel		-			
DIMENSIONS					
Length			86"		
Width (Chute up / down)	57" / 68"		62" / 73"		73" / 85"
Height (ROPS down / up)			52" / 74"		
Weight	1,459 / 1,592 lbs		1,488 / 1,621 lbs		1,591 lbs
WARRANTY					
Warranty Information*		3-year limited, no-hour-limit warranty 5-year limited, 1,200-hour limited warranty			
TECH PACKAGE					
Joystick Control Handle		-			
GPS / Tower Antenna		-			
Overlap Cutting / Tracking		-			

For full warranty details and exclusions, visit www.cubcadet.ca or your local dealer.

** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

PRO Z™ 900

Z 960 L EFI	Z 972 L EFI	Z 960 S EFI	Z 972 S EFI	Z 972 SD EFI	Z 972 SLD EFI
			Kawasaki™ FX1000V EFI		
			38.5 hp**		
			999cc		
			15 gal (twin 7.5 gal tanks)		
		Hydro Gear™ 5400 (16cc)		Hydro Gear 5400* (16cc) - Dual Wheel	Hydro Gear™ 5400 (16cc) - Dual Wheel
		Up to 22.5 kmh / 9.6 kmh			Up to 22.5 kmh / 9.6 kmh
60"	72"	60"		72"	
			Floating, fabricated 7ga (0.187") steel		
			7ga/7ga-1/4"		
			5/16" steel		
			3/4" trim-side (polymer)		
			3 high-lift Marbain blades / 18,500 fpm (approx.)		
			8" sealed cast-aluminum housing (maintenance-free)		
			High-density rubber		
		Foot pedal with spring assist			Electronic power deck lift system (included)
			16/1"-5"		
			2" x 2" quick-latch toolless foldable 3-position		
			5/16"-thick steel, standard rear hitch (e-coated)		
			Pre-drilled mounts for attachments		
			Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)		
			Integrated tie-down slots		
					6 LED Lights for 360 degrees of lighted visibility; amber beacon with 3 position adjustments
			2" x 3" solid steel with sealed ball bearings and isolation-dampening system		
			1/2"-thick steel with sealed ball bearings		
Warmer PTO clutch (200 ft-lb) with Soft-Start			Warmer PTO clutch (225 ft-lb) with Soft-Start		
Lap bar			Adjustable tilting steering wheel with EPS		
			Low-profile throttle lever with dash guard		
			Sealed key switch / fingertip engagement PTO / resettable maintenance meter		
		Hand operated			Hand operated with hydro-pump release
Smooth (run flat) 13" x 6.5" - 6"			Turf 16" x 6.5" - 8"		
Turf 24" x 12" - 12"					Dual TerraTrac tread 25" x 9" - 12" (18" trac width)
			High-back air-ride suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, isolation-dampening system mounted base (lateral suspension)		
					User-controlled lock / unlock swivel seat for operator leveling up to 30-degrees total / 15-degrees left or right travel
62" / 73"	74" / 85"	62" / 73"	88"	74" / 85"	
48" / 75"	52" / 75"	48" / 75"		49" / 75"	
1,447 lbs	1,596 lbs	1,580 lbs		1,850 lbs	1,890 lbs
			3-year limited, no-hour-limit warranty 5-year limited, 1,200-hour limited warranty		

PRO X™ SERIES

PRO X™ 400

PRO X™ 600

	X 434	X 448	X 636	X 648	X 654	X 654 EFI	X 660	X 660 EFI
ENGINE AND DRIVE SYSTEM								
Engine / Manufacturer		Kohler® KT-PRO	Kawasaki® F5600v	Kawasaki® FX691V	Kawasaki® FX801V	Kawasaki® FX820 EVO EFI	Kawasaki® FX801V	Kawasaki® FX820 EVO EFI
Horsepower		24 hp**	18.5 hp**	22 hp**	25.5 hp**	34.5 hp**	25.5 hp**	34.5 hp**
Displacement		747cc	603cc	726cc	852cc	822cc	852cc	822cc
Fuel Tank Capacity With Gauge		5 gal	6 gal			7.5 gal		
Transmission		Hydro-Gear® ZT-3100			12cc Hydro-Gear® Pumps / 14.5 cu.in. Parker Wheel Motors			
Ground Speed (forward/reverse)		Up to 11.2 kmh / 5.6 kmh	Up to 13.6 kmh / 5.6 kmh			Up to 16 kmh / 8 kmh		
MOWER DECK								
Cutting Width	34"	48"	36"	48"	54"		60"	
Blades	2 High-Lift 16.75" Blades with 0.625" blade overlap	3 High-Lift 16.5" Blades with 1.2" blade overlap	2 high-lift 18.5" Marbain® blades with 1.5" blade overlap	3 high-lift 17" Marbain® blades with 1.5" blade overlap	3 high-lift 19" Marbain® blades with 1.5" blade overlap		3 high-lift 21" Marbain® blades with 1.5" blade overlap	
Deck Construction	10 ga shell with 7 ga reinforcement on the bottom side only				10 ga shell with 7 ga top and bottom reinforcement			
Reinforcements (top/bottom – leading edge)	–				–			
Side Reinforcement	–				–			
Wear Guard	–				–			
Spindle Design	Sealed cast aluminum housing (maintenance-free)		5" sealed cast aluminum housing (maintenance-free)		HD 8" aluminum housing, 35mm double-row sealed ball bearings, 1-3/8" through-shaft and maintenance-free design			
Discharge Chute	High-density rubber				High-density rubber			
Deck Lift System								
Deck Height Adjust	Hand lever adjusting spring assist, pin selector for height				Hand lever adjusting spring assist, pin selector for height			
Cutting Height	1.5" - 4.5"		1.5" - 4"		1" - 5"			
Anti-Scalp Deck Gauge Wheels	–	2 front deck gauge wheels	–	2 front deck gauge wheels			4 front deck gauge wheels	
CHASSIS								
Frame	1.5" x 3" full-length tube frame		1.5" x 3" full-length tube frame		2" x 3" full-length tube frame			
Drive Axles	1"				1-1/8"			
Front Axle	1.5" x 3" tube construction				2" x 3" tube construction			
Front Caster / Yoke	5/16"				3/8" thick steel			
Rear Track Width	33"	35.75"	33"	47"	53"		57"	
Additional Frame Features	–				–			
OPERATION								
PTO Clutch Engagement & Type	Electronic with quick reset				Electronic with quick reset			
Starting	Electric starter				Electric starter			
Battery Cover / Storage	Netted storage		Toolless		Toolless battery cover / oversized cup holder; storage compartment with cargo net			
Suspension	3-position adjustable suspension platform		3-position rod adjust suspension foot platform		Hand lever adjust, 3-position spring suspension foot platform			
Instrumentation	Hour meter, key switch, throttle, choke			Hour meter, fuel gauge, key switch, throttle, choke		Hour meter, fuel gauge, key switch, throttle	Hour meter, fuel gauge, key switch, throttle	Hour meter, fuel gauge, key switch, throttle
Cushion Padding	3-position operator cushion		3-position operator cushion		3-position operator cushion with cargo pocket			
Parking Brake / Brake Type	Hand Lever Internal Brake		Hand lever control / scrub brake		Hand lever control / external band			
Front Caster Tires	11" x 6"-5" smooth		11" x 4"-5" smooth flat-free		13" x 5"-6" smooth flat-free			
Rear Drive Tires	20" x 6.5"-10"	20" x 8"-10"	21" x 8.5"-10"	24" x 9.5"-12"		24" x 12"-12"		
DIMENSIONS						69"		
Length	68"		62"					
Width (chute down/up)	34.375" / 45.75"	48.25" / 60.50"	50" / 38"	62" / 50"	68" / 56"		74" / 62"	
Height	49.25"				47"			
Weight	675	710	850	1,015	1,080		1,115	
WARRANTY								
Warranty Information*	See cubcadet.ca or your local dealer for warranty information		2-year limited, no-hour-limit		3-year limited, no-hour-limit warranty 5-year limited, 1,200-hour limited warranty			

For full warranty details and exclusions, visit www.cubcadet.ca or your local dealer.

** As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.



YOUR AUTHORIZED CUB CADET® DEALER MAKES YOUR EXPERIENCE EVEN BETTER.

INDEPENDENT DEALER
Cub Cadet®

Cub Cadet® dealers know their equipment. And they know how to take care of it and their customers. You'll get exceptional financing, great offers and the expertise you can only find from professionals who sell and service Cub Cadet® equipment every day.

Support as strong as our machines, seven days a week, visit cubcadet.ca
or call toll-free 1-800-668-1238



 [FACEBOOK.COM/CUBCADET](https://www.facebook.com/cubcadet)

 [@CUBCADETCA](https://twitter.com/cubcadetca)

 [CUBCADETNA](https://www.instagram.com/cubcadetna)

EXCEPTIONAL FINANCING OFFERS[†]



† Restrictions apply. See dealer for details.

Cub Cadet commercial products are intended for professional use.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual and on the machine. Models subject to limited availability.

Images may not reflect dealer inventory and/or unit specifications. Specifications subject to change without notice.

© 2025 Cub Cadet | Printed in Canada | CC23-389 519896